


**MARKER** CEMENT BOARD SCREWS


**FEATURES:**

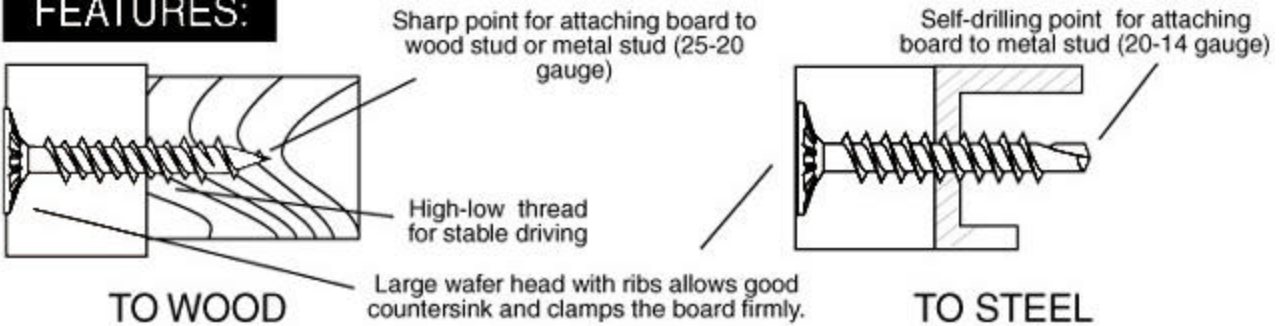

CEMENT BOARD: CEMENT AND REINFORCING MESH. INTERIOR BACKER ONLY (SHOWER, BATH, SPLASH & UNDERLAYMENT).

**MARKER** FIBER CEMENT BOARD SCREWS

**FEATURES:**

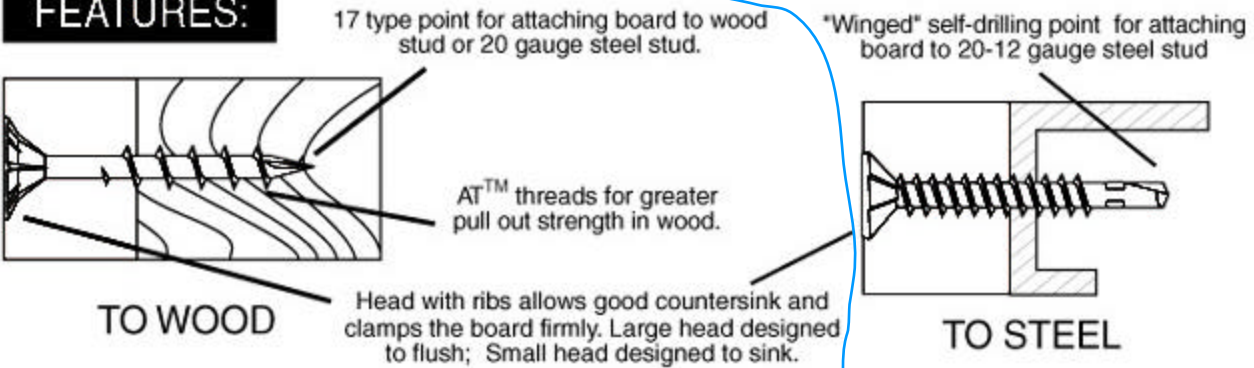

C-DRILL™ - MEETS OR EXCEEDS SAE J78 SPECIFICATION.  
 CWS-DRILL™ - MEETS OR EXCEEDS ANSI/ASME B18.6.4.  
 LIFE COAT® PLATING MEETS A MINIMUM 2,000 HOURS SALT SPRAY AS TESTED IN ACCORDANCE WITH ASTM B117 AND 25 CYCLES KESTERNICH.

 .323" (8.2mm) #2 REDUCED PHILLIPS .375" (9.5mm)	<p><b>C-DRILL™</b></p> <p><b>TO STEEL</b></p> <p>Fiber cement board to steel studs (20 ga - 16 ga). Specially designed wings to allow cutter head to countersink for finishing. Depth sensitive nosepiece recommended.</p>	
 .323" (8.2mm) #2 REDUCED PHILLIPS	<p><b>C-WING™</b></p> <p>Larger head design recommended for:</p> <ul style="list-style-type: none"> <li>Fiber cement board to steel studs</li> <li>Lap siding</li> <li>Fiber cement roofing trim</li> <li>Flooring for tile in kitchen &amp; bath</li> </ul>	
 .323" (8.2mm) QUADREX®	<p><b>CWS-DRILL™</b></p> <p><b>TO WOOD</b></p> <ul style="list-style-type: none"> <li>Small head is designed to countersink.</li> <li>AT™ thread provides greater pull-out value in wood.</li> </ul>	
 .375" (9.5mm) QUADREX®	<p><b>CWL-DRILL™</b></p> <ul style="list-style-type: none"> <li>Large head is designed to flush.</li> <li>AT™ thread provides greater pull-out value in wood.</li> </ul>	

FIBER CEMENT BOARD: CEMENT AND CELLULOSE FIBERS. INTERIOR AND EXTERIOR APPLICATIONS: BACKER BOARD, SIDING PLANKS, FLOOR UNDERLAYMENTS, SOFFITS, ETC.

PRODUCT SPECIFIC IN ICBO ER # 5135